


# MTP® 24f Harness Method

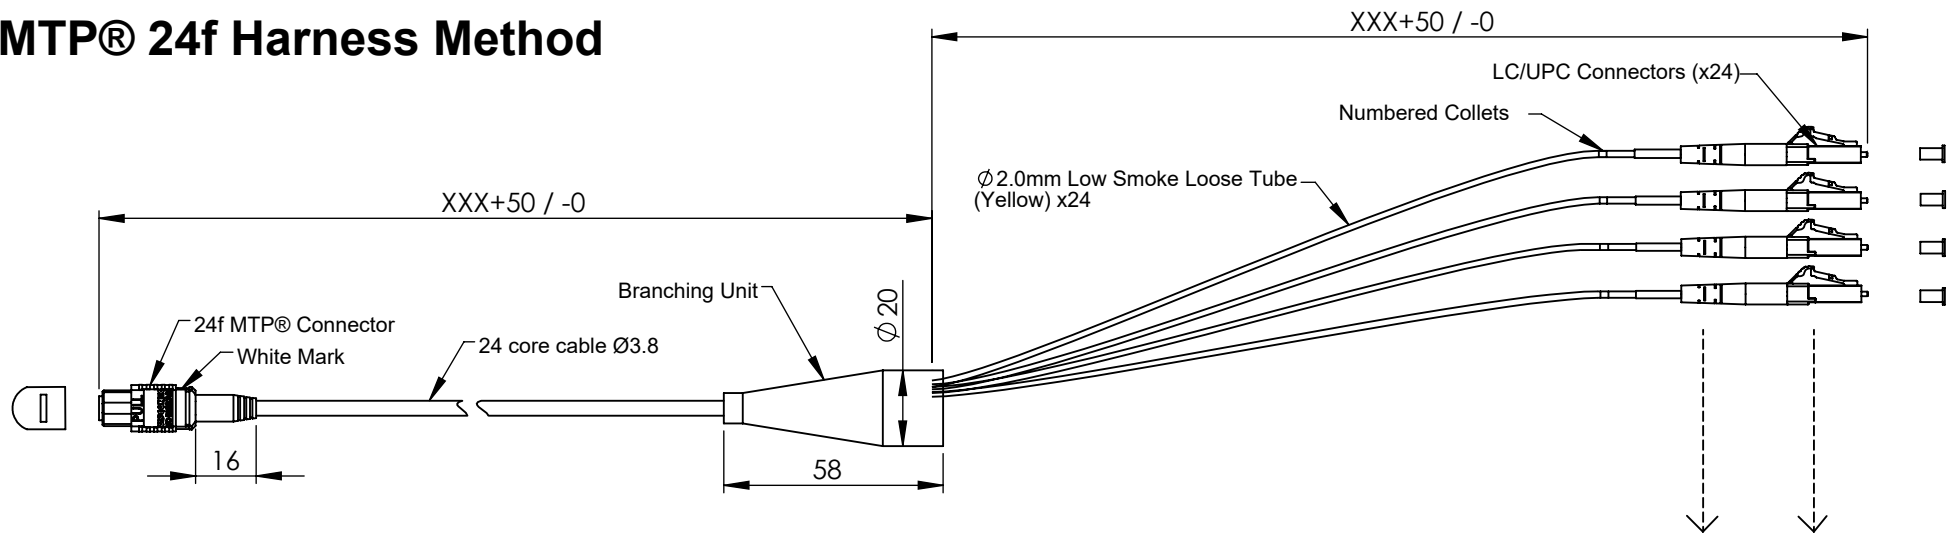



## Specifications

Cable type:  
 OM3 - Aqua  
 OM4 - Aqua  
 OS2 - Yellow


Packaging:  
 1-49mtrs coiled, packed in zip seal bags and 50+ on a reel

Connector Mating	IL Typical	IL Max	Return Loss
MTP® MM Standard	0.20dB	0.75dB	N/A
MTP® MM Elite	0.10dB	0.35dB	N/A
MTP® SM Standard	0.15dB	0.75dB	>60dB
MTP® SM Elite	0.10dB	0.35dB	>60dB

ch	Colour	Numbered Collets
A1	Blue	1
A2	Orange	2
A3	Green	3
A4	Brown	4
A5	Slate	5
A6	White	6
A7	Red	7
A8	Black	8
A9	Yellow	9
A10	Violet	10
A11	Rose(Pink)	11
A12	Aqua	12
B1	- Blue -	13
B2	- Orange -	14
B3	- Green -	15
B4	- Brown -	16
B5	- Slate -	17
B6	- White -	18
B7	- Red -	19
B8	- Black -	20
B9	- Yellow -	21
B10	- Violet -	22
B11	- Rose(pink) -	23
B12	- Aqua -	24

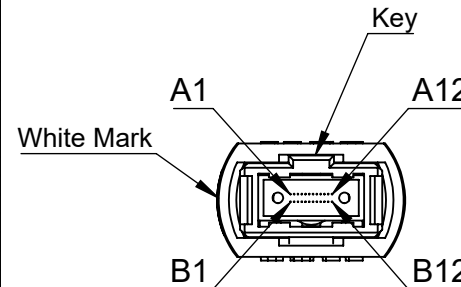

Dx Clip Method			
Type A		Type B	
Clip Side B	Clip Side A	Clip Side B	Clip Side A
1	24	1	13
2	23	2	14
3	22	3	15
4	21	4	16
5	20	5	17
6	19	6	18
7	18	7	19
8	17	8	20
9	16	9	21
10	15	10	22
11	14	11	23
12	13	12	24

ISSUE NO:	1	2	3	4	5	6	Customer	
Date	08/01/14	12/05/16	18/01/2021					
Checked by	P.Davenport	P.Davenport	K.Thomas					
Product App.	B.Williams	B.Williams	B.Williams					
Approved by			M.Lenihan					
Drawn	Material	Finish		Tolerances unless otherwise Stated		Title	Drawing Number	
G.Hilditch	RoHS compliant			All Dimensions in millimeters		MTP® 24f Harness Method	DN-0977	
Scale								
1:2								