

# DATASHEET

## MTP®-F/LC 8-fiber patch cable OS2



G657A1

100 Gbit

### Description

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,  
4 LC-Duplex connector on the other side

**LowLoss** version: attenuation per Fanout max. 0,35dB

Matrix: 8 fibers

Furcation length: 50cm

Cable diameter multi-connector: 3mm

Cable diameter single-connector: 2mm

Colour: OM4 and OS2 acc. to colour code DIN VDE 0888

### General data

Category	OS2
Colour outer sheath	gelb
Crossed	nein
Connector connection 1	MTP-F
Connector connection 2	LC-Duplex

### Kabelaufbau

Cable Diameter	3,0 mm
----------------	--------

### Environmental conditions

Operating Temperature	-20 – 70 °C
Storage Temperature	-20 – 70 °C

### Transmission characteristics

Fiber	G657A1
Coding	1:1

### Standards, approvals, certifications

With rodent protection	False
Halogen free (according to EN 50267-2-3)	True


### Available variants

# DATASHEET

## MTP®-F/LC 8-fiber patch cable OS2

Article no.	Title	Length	Number of fibres	Number of connectors connection 1	Number of connectors connection 2
MTPF08LCOS2-1	MTP®-F/LC 8-fiber patch cable OS2, LSZH yellow, 1m	1.0 m	8	1 x MTP® female	8 x LC
MTPF08LCOS2-2	MTP®-F/LC 8-fiber patch cable OS2, LSZH yellow, 2m	2.0 m	8	1 x MTP® female	8 x LC
MTPF08LCOS2-3	MTP®-F/LC 8-fiber patch cable OS2, LSZH yellow, 3m	3.0 m	8	1 x MTP® female	8 x LC
MTPF08LCOS2-5	MTP®-F/LC 8-fiber patch cable OS2, LSZH yellow, 5m	5.0 m	8	1 x MTP® female	8 x LC
MTPF08LCOS2-10	MTP®-F/LC 8-fiber patch cable OS2, LSZH yellow, 10m	10.0 m	8	1 x MTP® female	8 x LC

### Technical drawings

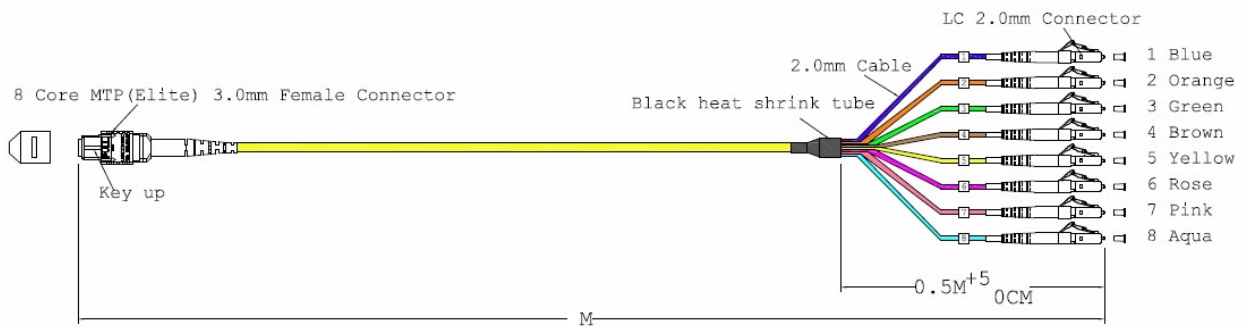

# DATASHEET

## MTP®-F/LC 8-fiber patch cable OS2

### Technical drawings

